

4K H.265 Pro NVR 7000 Series

UHD 2160P Ultra HD	H.265+ HEVC H.265+	HDMI	VGA	Dual Stream	Mobile Connection	Audio In/Out
Alarm In/Out	RAID	P2P	VCA			



MS-N7016-UH/MS-N7032-UH


DATASHEET

KEY FEATURES

- ▶ **Powerful Decoding Capacity** (Maximum supporting 16*1080P or 32*720P network cameras viewing at the same time.)
- ▶ **HDMI & VGA** (Providing both HDMI and VGA ports for users to choose according to their monitor types.)
- ▶ **4*3.5" HDD** (4 SATA of 3.5" HDD, providing 10TB capacity for each HDD, up to 40TB total hard disk storage.)
- ▶ **Dual LAN Interfaces** (Designed for three network working modes as Multi-address, Load Balance and Net Fault-tolerance.)
- ▶ **Video Content Analysis** (With 10 detection modes, VCA greatly enhances the performance bringing comprehensive surveillance functions.)

H.265+H.264

Smartly figure out and switch between H.264 and H.265 automatically. It will extend the days to save recording file with H.265 than with other compressions.

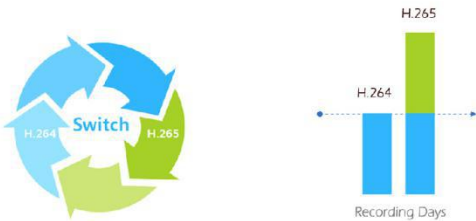

Powerful Decoding Capacity

Maximum support up to 16*1080P or 32*720P network cameras viewing at the same time.



4K Video Viewing Experience

Milesight 4K H.265 Pro NVR 7000 Series supports up to 4K definition (3840*2160, effectively four times that of Full HD) live viewing, playback and recording, providing users with ultra-high-definition video viewing experience.



RAID 0/1/5/6/10

RAID (Redundant Array of Independent Disks) is a method of combining hard disks as a logical unit to achieve redundancy and greater speed of writing and reading data.

RAID Type	No. of hard disk drives required	Total Storage Space
RAID 10	4, 6, 8	n/2
RAID 6	≥ 4	n-2
RAID 5	≥ 3	n-1
RAID 1	2	n/2
RAID 0	≥ 2	n





Model			MS-N7016-UH	MS-N7032-UH
Video/Audio Input	Network Video Input		16-CH	32-CH
	Bandwidth	Incoming	160Mbps	256Mbps or 200Mbps(when RAID is enabled)
Outgoing		160Mbps	256Mbps or 200Mbps(when RAID is enabled)	
Video/Audio Output	HDMI Output		1-CH, Resolution: 3840x2160/60Hz, 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output	
	VGA Output		1-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
	Dual Stream		Support	
	Recording Resolution		12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF	
	Synchronous Playback		4*(30fps @8MP), 5*(30fps @6MP), 6*(30fps @5MP), 8*(30fps @4MP), 10*(30fps @3MP), 16*(30fps @1080P), 16*(30fps @720P)	4*(30fps @8MP), 5*(30fps @6MP), 6*(30fps @5MP), 8*(30fps @4MP), 10*(30fps@3MP), 16*(30fps@1080P), 32*(30fps@720P)
Video/Audio Compression	Video Compression		H.265 ⁺ /H.265(HEVC)/H.264 ⁺ /H.264	
	Audio Compression		G.711/AAC	
	Sample Rate		8KHz/16KHz	
	Synchronous Recording		16*5MP	32*5MP
Storage	SATA		4*SATA HDD(3.5")	
	Capacity		Up to 10TB capacity for each HDD	
Disk Array	Array Type		RAID0, RAID1, RAID5, RAID6, RAID10	
Recording Management	Recording Type		Continuous, Motion Detection, Alarm, Smart Event, Event (Motion Detection, Alarm, Smart Event)	
	Snapshot		Manual Snapshot	
	Playback		Video Playback, Image Playback	
Backup	Backup		Video Backup, Image Backup	
Network	Protocol		IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS	
External Interface	Network Interface		2*RJ45 100M/1000M	
	Serial Interface		1*RS-485 Series Port for PTZ	
			1*RS-232 Series Port for Console	
			1*RS-485 Series Port for Keyboard	
	USB Interface		1*USB 3.0; 2*USB 2.0	
	Audio Input/Output		1*RCA/1*RCA	
Alarm Input/Output		16-CH/4-CH		
General	Compatibility		ONVIF	
	Video Analysis		Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting	
	Keyboard Control		Milesight Keyboard (MS-K02)	
	Power Supply		AC 100V~240V 50Hz~60Hz	
	Consumption		≤15W(Without HDD)	
	Working Conditions		Temperature: -10℃~55℃/Humidity: 10%~90%	
	Dimensions		Rack Mountable Chassis (1.5U Standard) 440mm(W)X320mm(D)X66.8mm(H)	
	Weight		4.1Kg	
Warranty		3/5 Years		

4K H.265 Pro NVR 7000 Series



Interfaces

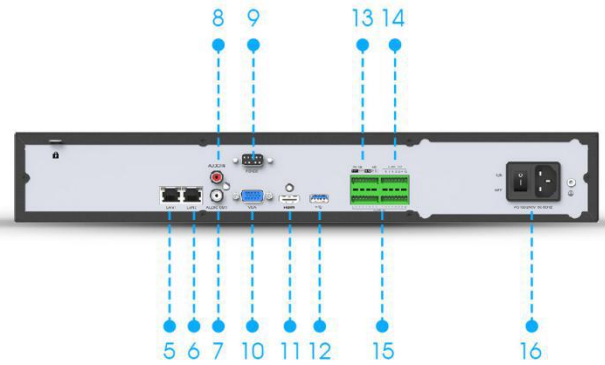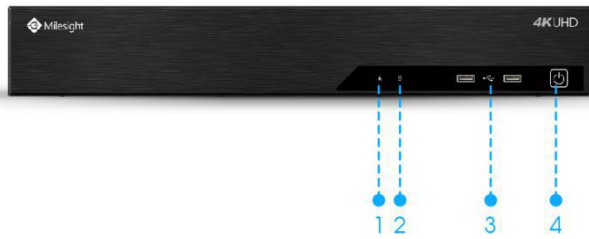


- 1. Run Indicator 2. HDD Indicator 3. USB 4. Power Light
- 5. LAN1 6. LAN2 7. Audio Out 8. Audio In
- 9. RS-232 10. VGA 11. HDMI 12. USB
- 13. RS-485 14. Alarm Out 15. Alarm In 16. Power

Installation of HDDs




Structure Diagrams

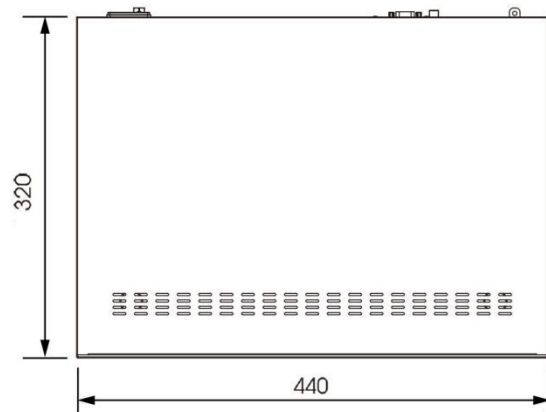

Units: mm

Naming Convention



Milesight Technology Co.,Ltd. | www.milesight.com

Contact Us : sales@milesight.com support@milesight.com

Add : 220 NE 51st Street, Oakland Park, Florida 33334, USA
Tel : +1-800-561-0485

Add : 925, Anyang SK V1 Center, LS -ro 116beon-gil, Dongan-gu, Anyang-si, Korea
Tel : +82-31-990-7772

Add : No.23 Wanghai Road, 2nd Software Park, Xiamen, China
Tel : +86-592-5922772

